

PRICE BOOK

JULY 1, 2005



ALARM LOCK SYSTEMS, INC.

345 Bayview Avenue
Amityville, NY 11701

1-800-ALA-LOCK (252-5625)
(631) 789-4871 Tel or (631) 789-3383 Fax



Important Things to Know about Doing Business with Alarm Lock Systems, Inc.

Prices: Prices shown in this book are list prices. All customers with direct accounts receive a discount letter along with each new price book. If you have a direct account with Alarm Lock you may request a copy of your discount letter in writing or by contacting you local sales representative.

Terms: 2%/10 Days Net 30. Any invoice not paid within the 10 days following the invoice date cannot be discounted.

Freight Allowance: Shipments are F.O.B. Amityville, NY. Freight allowed within the continental U.S.A. is \$5,000.00.

Orders: Order acknowledgements are exact copies of your order as entered at the factory and can be faxed to you. If you wish to receive an acknowledgment, please specify on your purchase order along with a valid fax number.

Drop Shipments: Any order not shipped directly to the customer's address or one of it's branches is subject to a 10% surcharge. The 10% will be added to the net price on the order.

Claims: All claims for discrepancies in shipments must be submitted within 10 days following receipt of said shipment. No short shipments or claims for damages will be honored after the 10 day period.

Warranty: Please see the last page in this price book for Alarm Lock's complete warranty policy.

Website: Visit us at www.alarmlock.com for a complete list of sales representatives by state, product specifications, technical data and downloadable pdf files of all Alarm Lock's products.

If you need to contact us:

Alarm Lock Systems, Inc.
345 Bayview Ave.
Amityville, NY 11701

Toll free number – 1-800-ALA-LOCK (252-5625)
Direct telephone – 631-789-4871
Direct fax – 631-789-3383



TABLE OF CONTENTS

	Page
.....	
Trilogy DL2700.....	4
Trilogy DL2800.....	5
Trilogy DL3000.....	6
Trilogy DL4100.....	7
Trilogy PDL3000	8
Trilogy PL3000	9
Trilogy PDL4100/PL4100	10
Trilogy DL3500.....	11 & 12
Trilogy DL4500.....	13 & 14
Trilogy PDL3500/PL3500	15 & 16
Trilogy PDL4500/PL4500	17 & 18
Trilogy Exit Trim	19, 20 & 21
Trilogy Accessories.....	22
Trilogy DK3000/PDK3000	23
Alarmed Panic Locks	24
Door Alarms	25
Delayed Egress Locks.....	26
Electric Deadbolts	26
Remote Release Magnet.....	27
Power Magnets	27 & 28
Alarm Lock Warranty and Return Policy.....	29

TRILOGY ELECTRONIC DIGITAL LOCKS

DL2700 SERIES – Electronic battery operated digital lock. Holds up to 17 user codes, 1 Master, 1 Management & 15 users

SPECIFICATIONS:

Door Thickness: Fits 1 5/8" to 1 7/8". Other thickness, please consult factory
 Backset: 2 3/4" (2 3/8" also available)
 Strike: 1 1/8"x 2 3/4" T strike & 1 1/4" x 4 7/8"
 ASA strike included
 Latchbolt: UL Listed, fire rated 3 hours, 1/2" throw reversible
 Handing: Non-handed
 Power: 5 AA alkaline batteries (included)
 Keypad: All metal, 12 button. All functions programmed through keypad.
 Door prep: Standard ANSI A115 Series prep, modified by adding additional through-bolt holes
 Compliances: Grade 1 heavy duty cylindrical lockset. UL listed To the 10C Positive Pressure Specification. FCC Certified . ADA compliant levers
 Cylinder: 6 pin solid brass, SC1 keyway, furnished with all key override locks. Schlage, Corbin-Russwin CL, Sargent 480 series, ASSA 65-611 & Lori cylinders can also be used with HW620 tailpiece (supplied)
 Interchangeable Core Models: Standard model accepts 6 & 7 pin cylinders from Best, Falcon, Arrow, KSP, Medeco Keymark & Kaba Peaks. IC core models prepped for 6 & 7 pin Yale, Medeco, Sargent, Corbin-Russwin & Schlage are also available



PRODUCT	FINISH	LIST PRICE
DL2700	US26D	640.00
Standard key override	US26, US3, US5 & US10B	695.00
DL2775	US26D	655.00
Standard Key override Regal (curved)	US26, US3, US5 & US10B	710.00
DL2700IC*	US26D	655.00
Interchangeable core	US26, US3, US5 & US10B	710.00
DL2775IC*	US26D	670.00
Interchangeable core Regal (curved)	US26, US3, US5 & US10B	725.00
DL2700WP	US26D	680.00
Weather proof key override	US26, US3, US5 & US10B	735.00
DL2775WP	US26D	695.00
Weather proof key override Regal (curved)	US26, US3, US5 & US10B	750.00
DL2700WPIC*	US26D	695.00
Weather proof Interchangeable core	US26, US3, US5 & US10B	750.00
DL2775WIC*	US26D	710.00
New Regal (curved) lever Interchangeable core	US26, US3, US5 & US10B	765.00

***Add "C" for Corbin, "M" for Medeco, "R" for Sargent, "Y" for Yale and "S" for Schlage to end of the part number for specially prepped IC core models. Add \$15.00 to the list price shown above. Note: Schlage IC prep only available in Regal curved lever (75).**

DL2750	US26D	640.00
Standard key override knob	US26, US 3 & US5	695.00
DL2750IC	US26D	655.00
Interchangeable core knob	US26, US 3 & US5	710.00
DL2750WPIC	US26D	695.00
Weather proof Interchangeable core knob	US26D	695.00
DL2700SKLE	Mounted DL2700 demo	640.00

TRILOGY ELECTRONIC DIGITAL LOCKS

DL2800 SERIES – Electronic battery operated digital lock. Holds up to 200 codes, Master, Management, Supervisor & basic user. 150 event schedule, real time clock & 1,000 event audit trail.

SPECIFICATIONS:

Door Thickness: Fits 1 5/8" to 1 7/8". Other thickness, please consult factory
 Backset: 2 3/4" (2 3/8" also available)
 Strike: 1 1/8" x 2 3/4" T strike & 1 1/4" x 4 7/8" ASA strike included
 Latchbolt: UL Listed, fire rated 3 hours, 1/2" throw reversible
 Handing: Non-handed
 Power: 5 AA alkaline batteries (included)
 Keypad: All metal, 12 button. All functions programmed through keypad.
 Door prep: Standard ANSI A115 Series prep, modified by adding additional through-bolt holes
 Compliances: Grade 1 heavy duty cylindrical lockset. UL listed To the 10C Positive Pressure Specification. FCC Certified. ADA compliant levers
 Cylinder: 6 pin solid brass, SC1 keyway, furnished with all key override locks. Schlage, Corbin-Russwin CL, Sargent 480 series, ASSA 65-611 & Lori cylinders can also be used with HW620 tailpiece (supplied)
 Interchangeable Core Models: Standard model accepts 6 & 7 pin cylinders from Best, Falcon, Arrow, KSP, Medeco Keymark & Kaba Peaks.
 IC core models prepped for 6 & 7 pin Yale, Medeco, Sargent, Corbin-Russwin & Schlage are also available



All DL2800 LOCKS ARE WEATHER-RESISTANT

PRODUCT	FINISH	LIST PRICE
DL2800 Standard key override	US26D US26, US3, US5 & US10B	765.00 820.00
DL2875 Standard key override Regal (curved) lever	US26D US26, US3, US5 & US10B	780.00 835.00
DL2800IC* Interchangeable core	US26D US26, US3, US5 & US10B	780.00 835.00
DL2875IC* Interchangeable core Regal (curved) lever	US26D US26, US3, US5 & US10B	795.00 850.00

*Add "C" for Corbin, "M" for Medeco, "R" for Sargent, "Y" for Yale and "S" for Schlage to end of the part number for specially prepped IC core models. Add \$15.00 to the list price shown above. Note: Schlage IC prep only available in Regal curved lever (75).

DL2800SK/26D	Mounted DL2800 demo	765.00
AL-DTMII	Data Transfer Module	380.00
AL-PCI2	Computer interface cable for serial connection includes DL-Windows Software	100.00
ALPCI2-U	Computer interface cable with serial And USB connections includes DL-Windows software	200.00
AL-IR1	Infrared Printer	440.00

TRILOGY ELECTRONIC DIGITAL LOCKS

DL3000 SERIES – Electronic battery operated digital lock. Holds up to 300 codes, Master, Management, Supervisor & basic user. 150 event schedule, real time clock & audit trail.

SPECIFICATIONS:

Door Thickness: Fits 1 5/8" to 1 7/8". Other thickness, please consult factory
 Backset: 2 3/4" (2 3/8" also available)
 Strike: 1 1/8"x 2 3/4" T strike & 1 1/4" x 4 7/8" ASA strike included
 Latchbolt: UL Listed, fire rated 3 hours, 1/2" throw reversible
 Handing: Non-handed
 Power: 5 AA alkaline batteries (included)
 Keypad: All metal, 12 button. All functions programmed through keypad.
 Door prep: Standard ANSI A115 Series prep, modified by adding additional through-bolt holes
 Compliances: Grade 1 heavy duty cylindrical lockset. UL listed To the 10C Positive Pressure Specification. FCC Certified . ADA compliant levers
 Cylinder: 6 pin solid brass, SC1 keyway, furnished with all key override locks. Schlage, Corbin-Russwin CL, Sargent 480 series, ASSA 65-611 & Lori cylinders can also be used with HW620 tailpiece (supplied)
 Interchangeable Core Models: Standard model accepts 6 & 7 pin cylinders from Best, Falcon, Arrow, KSP, Medeco Keymark & Kaba Peaks.
 IC core models prepped for 6 & 7 pin Yale, Medeco, Sargent, Corbin-Russwin & Schlage are also available



PRODUCT	FINISH	LIST PRICE
DL3000	US26D	940.00
Standard key override	US26, US3, US5 & US10B	995.00
DL3075	US26D	955.00
Standard key override	US26, US3, US5 & US10B	1,010.00
Regal (curved) lever		
DL3000IC*	US26D	955.00
Interchangeable core	US26, US3, US5 & US10B	1,010.00
DL3075IC*	US26D	970.00
Interchangeable core	US26, US3, US5 & US10B	1,025.00
Regal (curved) lever		
DL3000WP	US26D	980.00
Weather proof key override	US26, US3, US5 & US10B	1,035.00
DL3075WP	US26D	995.00
Weather proof key override	US26, US3, US5 & US10B	1,050.00
Regal (curved) lever		
DL3000WPIC*	US26D	995.00
Weather proof interchangeable core	US26, US3, US5 & US10B	1,050.00
DL3075WPIC*	US26D	1,010.00
Weather proof interchangeable core	US26, US3, US5 & US10B	1,065.00
Regal (curved) lever		

***Add "C" for Corbin, "M" for Medeco, "R" for Sargent, "Y" for Yale and "S" for Schlage to end of the part number for specially prepped IC core models. Add \$15.00 to the list price shown above. Note: Schlage IC prep only available in Regal curved lever (75).**

DL3000SKLE	Mounted DL3000 demo	980.00
AL-DTMII	Data Transfer Module	380.00
AL-PCI2	Computer interface cable for serial connection with DL-Windows Software	100.00
ALPCI2-U	Computer interface cable for serial & USB connection with DL-Windows software	200.00
AL-IR1	Infra red Printer	440.00

TRILOGY ELECTRONIC DIGITAL LOCKS WITH PRIVACY & RESIDENCY FEATURES

DL4100 SERIES - Electronic battery operated digital lock. Holds up to 2000 codes, Master, Management, Supervisor & basic user. 500 event schedule, real time clock & 40,000 event audit trail. Privacy feature will lock out all users for programmed amount of time. Residency feature-allows exiting without having to lock the door.

SPECIFICATIONS:

Door Thickness: Fits 1 5/8" to 1 7/8". Other thickness, please consult factory

Backset: 2 3/4" (2 3/8" also available)

Strike: 1 1/8"x 2 3/4" T strike & 1 1/4" x 4 7/8"
ASA strike included

Latchbolt: UL Listed, fire rated 3 hours, 1/2" throw reversible

Handing: Non-handed

Power: 5 AA alkaline batteries (included)

Keypad: Weatherproof all metal, 12 button. All functions programmed through keypad.

Door prep: Standard ANSI A115 Series prep, modified by adding additional through-bolt holes

Compliances: Grade 1 heavy duty cylindrical lockset. UL listed To the 10C Positive Pressure Specification. FCC Certified . ADA compliant levers

Cylinder: 6 pin solid brass, SC1 keyway, furnished with all key override locks. Schlage, Corbin-Russwin CL, Sargent 480 series, ASSA 65-611 & Lori cylinders can also be used with HW620 tailpiece (supplied)

Interchangeable Core Models: Standard model accepts 6 & 7 pin cylinders from Best, Falcon, Arrow, KSP, Medeco Keymark & Kaba Peaks.
IC core models prepped for **6 and 7 pin** Yale, Medeco, Sargent, Corbin-Russwin & Schlage are also available



ALL DL4100 LOCKS ARE WEATHER RESISTANT

PRODUCT	FINISH	LIST PRICE
DL4100 Standard key override	US26D US26, US3, US5 & US10B	920.00 985.00
DL4175 Standard key override w/Regal (curved) lever	US26D US26, US3, US5 & US10B	940.00 990.00
DL4100IC Interchangeable core prepped for Best®	US26D US26, US3, US5 & US10B	950.00 1,005.00
DL4175IC Interchangeable core prepped for Best® W/Regal (curved) lever	US26D US26, US3, US5 & US10B	965.00 1,020.00

***Add "C" for Corbin, "M" for Medeco, "R" for Sargent, "Y" for Yale and "S" for Schlage to end of the part number for specially prepped IC core models. Add \$15.00 to the list price shown above. Note: Schlage IC prep only available in Regal curved lever (75).**

DL4100SK/26D	Mounted sales kit	940.00
AL-PCI2	Computer interface cable for serial connection includes DL-Windows software	100.00
ALPCI2-U	Computer interface cable for serial and USB connection includes DL-Windows software	200.00
AL-IR1	Infra-red Printer	430.00
AL-DTMI	Data Transfer Module	380.00

TRILOGY ELECTRONIC DIGITAL PROXIMITY LOCKS

PDL3000 SERIES - Electronic battery operated digital proximity lock. Holds up to 2000 codes, Master, Management, Supervisor & basic user. 500 event schedule, real time clock & 40,000 event audit trail. Will read most HID card and keyfob formats.

SPECIFICATIONS:

Door Thickness: Fits 1 5/8" to 1 7/8". Other thickness, please consult factory

Backset: 2 3/4" (2 3/8" also available)

Strike: 1 1/8"x 2 3/4" T strike & 1 1/4" x 4 7/8" ASA strike included

Latchbolt: UL Listed, fire rated 3 hours, 1/2" throw reversible

Handing: Non-handed

Power: 5 AA alkaline batteries (included)

Keypad: Weatherproof all metal, 12 buttons. All functions programmed through keypad. Proximity antenna housing molded of ultra high strength, impact resistant Lexan®

Door prep: Standard ANSI A115 Series prep, modified by adding additional through-bolt holes

Compliances: Grade 1 heavy duty cylindrical lockset. UL listed To the 10C Positive Pressure Specification. FCC Certified . ADA compliant levers

Cylinder: 6 pin solid brass, SC1 keyway, furnished with all key override locks. Schlage, Corbin-Russwin CL, Sargent 480 series, ASSA 65-611 & Lori cylinders can also be used with HW620 tailpiece (supplied)

Interchangeable Core Models: Standard model accepts 6 & 7 pin cylinders from Best, Falcon, Arrow, KSP, Medeco Keymark & Kaba Peaks.
IC core models prepped for **6 and 7 pin** Yale, Medeco, Sargent, Corbin-Russwin & Schlage are also available



ALL PDL3000 PROXIMITY LOCKS ARE WEATHER-RESISTANT

PRODUCT	FINISH	LIST PRICE
PDL3000	US26D	1,280.00
Standard key override	US26, US3, US5 & US10B	1,335.00
PDL3075	US26D	1,295.00
Standard key override Regal (curved) lever	US26, US3, US5 & US10B	1,350.00
PDL3000IC*	US26D	1,295.00
Interchangeable core	US26, US3, US5 & US10B	1,350.00
PDL3075IC*	US26D	1,310.00
Interchangeable core Regal (curved) lever	US26, US3, US5 & US10B	1,365.00

***Add "C" for Corbin, "M" for Medeco, "R" for Sargent, "Y" for Yale and "S" for Schlage to end of the part number for specially prepped IC core models. Add \$15.00 to the list price shown above. Note: Schlage IC prep only available in Regal curved lever (75).**

PDL3000SKLE	Mounted DL3000 demo	1,280.00
AL-PCI2	Computer interface cable for serial connection includes DL-Windows software	100.00
ALPCI2-U	Computer interface cable for serial and USB connection includes DL-Windows software	200.00
AL-IR1	Infra-red Printer	440.00
AL-DTMII	Data Transfer Module	380.00
AI-PRE	Prox Card Enroller	630.00
ALHID1326	Proximity Access Cards 100 Per Box	440.00
ALHID1336	Proximity, Magnetic Stripe and Photo ID cards 100 per box	895.00
ALHID1386	Proximity and Photo ID Card 100 per box	810.00
ALHID1391	MicroProx Tag 10 per box	80.00
ALHID1346	Proximity keyfob 10 per box	100.00

NEW PRODUCT

TRILOGY ELECTRONIC PROXIMITY ONLY LOCKS

PL3000 SERIES - Electronic battery operated proximity lock. Holds up to 2000 codes, Master, Management, Supervisor & basic user. 500 event schedule, real time clock & 40,000 event audit trail. Will read most HID card and keyfob formats

SPECIFICATIONS:

Door Thickness: Fits 1 5/8" to 1 7/8". Other thickness, please consult factory
 Backset: 2 3/4" (2 3/8" also available)
 Strike: 1 1/8"x 2 3/4" T strike & 1 1/4" x 4 7/8"
 Latchbolt: ASA strike included
 UL Listed, fire rated 3 hours, 1/2" throw reversible
 Handing: Non-handed
 Power: 5 AA alkaline batteries (included)
 Programming: 9 prox program cards included
 Door prep: Standard ANSI A115 Series prep, modified by adding additional through-bolt holes
 Compliances: Grade 1 heavy duty cylindrical lockset. UL listed To the 10C Positive Pressure Specification. FCC Certified. ADA compliant levers
 Cylinder: 6 pin solid brass, SC1 keyway, furnished with all key override locks. Schlage, Corbin-Russwin CL, Sargent 480 series, ASSA 65-611 & Lori cylinders can also be used with HW620 tailpiece (supplied)
 Interchangeable Core Models: Standard model accepts 6 & 7 pin cylinders from Best, Falcon, Arrow, KSP, Medeco Keymark & Kaba Peaks.
 IC core models prepped for **6 and 7 pin** Yale, Medeco, Sargent, Corbin-Russwin & Schlage are also available



ALL PL3000 PROXIMITY LOCKS ARE WEATHER-RESISTANT

PRODUCT	FINISH	LIST PRICE
PL3000	US26D	1,280.00
Standard key override	US26, US3, US5 & US10B	1,335.00
PL3075	US26D	1,295.00
Standard key override	US26, US3, US5 & US10B	1,350.00
Regal (curved) lever		
PL3000IC*	US26D	1,295.00
Interchangeable core	US26, US3, US5 & US10B	1,350.00
PL3075IC*	US26D	1,310.00
Interchangeable core	US26, US3, US5 & US10B	1,365.00
Regal (curved) lever		

*Add "C" for Corbin, "M" for Medeco, "R" for Sargent, "Y" for Yale and "S" for Schlage to end of the part number for specially prepped IC core models. Add \$15.00 to the list price shown above. Note: Schlage IC prep only available in Regal curved lever (75).

PL3000SKLE	Mounted DL3000 demo	1,280.00
AL-PCI2	Computer interface cable for serial connection includes DL-Windows software	100.00
ALPCI2-U	Computer interface cable for serial and USB connection includes DL-Windows software	200.00
AL-IR1	Infra-red Printer	440.00
AL-DTMII	Data Transfer Module	380.00
AI-PRE	Prox Card Enroller	630.00
ALHID1326	Proximity Access Cards 100 Per Box	440.00
ALHID1336	Proximity, Magnetic Stripe and Photo ID cards 100 per box	895.00
ALHID1386	Proximity and Photo ID Card 100 per box	810.00
ALHID1391	MicroProx Tag 10 per box	80.00
ALHID1346	Proximity keyfob 10 per box	100.00



TRILOGY ELECTRONIC DIGITAL PROXIMITY LOCKS WITH PRIVACY & RESIDENCY FEATURES

PDL4100/PL4100 SERIES - Electronic battery operated digital proximity lock. Holds up to 2000 codes, Master, Management, Supervisor & basic user. 500 event schedule, real time clock & 40,000 event audit trail. Will read most HID card and keyfob formats. Privacy feature will lock out all users for a programmed amount of time. Residency feature-allows exiting without having to lock the door.

SPECIFICATIONS:

Door Thickness: Fits 1 5/8" to 1 7/8". Other thickness, please consult factory
 Backset: 2 3/4" (2 3/8" also available)
 Strike: 1 1/8"x 2 3/4" T strike & 1 1/4" x 4 7/8" ASA strike included
 Latchbolt: UL Listed, fire rated 3 hours, 1/2" throw reversible
 Handing: Non-handed
 Power: 5 AA alkaline batteries (included)
 Keypad: Weatherproof all metal, 12 button. All functions programmed through keypad. Proximity antenna housing molded of ultra high strength, impact resistant Lexan®
 Door prep: Standard ANSI A115 Series prep, modified by adding additional through-bolt holes
 Compliances: Grade 1 heavy duty cylindrical lockset. UL listed To the 10C Positive Pressure Specification. FCC Certified . ADA compliant levers
 Cylinder: 6 pin solid brass, SC1 keyway, furnished with all key override locks. Schlage, Corbin-Russwin CL, Sargent 480 series, ASSA 65-611 & Lori cylinders can also be used with HW620 tailpiece (supplied)
 Interchangeable Core Models: Standard model accepts 6 & 7 pin cylinders from Best, Falcon, Arrow, KSP, Medeco Keymark & Kaba Peaks.
 IC core models prepped for **6 pin** Yale, Medeco, Sargent, Corbin-Russwin & Schlage are also available



ALL PDL4100 LOCKS ARE WEATHER-RESISTANT

PRODUCT	FINISH	LIST PRICE
PDL4100 /PL4100	US26D	1,195.00
	US26, US3, US5 & US10B	1,255.00
PDL4175/PL4175	US26D	1,225.00
	US26, US3, US5 & US10B	1,290.00
PDL4100IC/PL4100IC	US26D	1,225.00
	US26, US3, US5 & US10B	1,290.00
PDL4175IC/PL4175IC	US26D	1,260.00
	US26, US3, US5 & US10B	1,320.00

***Add "C" for Corbin, "M" for Medeco, "R" for Sargent, "Y" for Yale and "S" for Schlage to end of the part number for specially prepped IC core models. Add \$15.00 to the list price shown above. Note: Schlage IC prep only available in Regal curved lever.**

PDL4100SK/26D	Mounted PDL4100 demo	1,215.00
AL-PCI2	Computer interface cable for serial connection Includes DL-Windows software	100.00
ALPCI2-U	Computer interface cable for serial and USB connection Includes DL-Windows software	200.00
AL-IR1	Infra-red Printer	440.00
AL-DTMII	Data Transfer Module	380.00
AI-PRE	Prox Card Enroller	630.00
ALHID1326	Proximity Access Cards 100 Per Box	440.00
ALHID1336	Proximity, Magnetic Stripe and Photo ID cards 100 per box	895.00
ALHID1386	Proximity and Photo ID Card 100 per box	810.00
ALHID1391	MicroProx Tag 10 per box	80.00
ALHID1346	Proximity keyfob 10 per box	100.00

TRILOGY ELECTRONIC DIGITAL MORTISE LOCKS

DL3500 SERIES - Electronic battery operated digital mortise lock. Holds up to 300 codes, Master, Management, Supervisor & basic user. 150 event schedule, real time clock & audit trail.

SPECIFICATIONS:

Door Thickness: Fits 1 3/8" to 1 7/8" (4.46cm).
 Backset: 2 3/4" standard
 Strike: 1 1/4" x 4 7/8" strike included
 Handing: Specify RH or LH when ordering, lock is reversible
 In the field
 Power: 5 AA alkaline batteries (included)
 Keypad: All metal, 12 button. All functions programmed through keypad.
 Door prep: Standard ANSI A115 Mortise prep, modified by adding additional through-bolt holes
 Compliances: Steelcase lockbody meets BHMA specifications For Grade 1 locks. UL listed to the 10C Positive Pressure Specification. FCC Certified. ADA compliant levers
 Functions: Classroom function feature stainless steel latchbolt With 3/4" (1.91cm) projection and deadlocking latch Deadbolt function feature stainless steel deadbolt with 1" (2.55cm) projection, latchbolt with 3/4" (1.91cm) projection and deadlocking latch Deadbolt may be projected from key cylinder from outside door or turn-piece from inside door
 Cylinder: 1 3/8" (3.5cm) mortise cylinder supplied. Will Accept 1 3/8" to 1 1/2" (3.5 – 3.82cm) mortise Cylinder. Classroom function supplied with straight Cam and deadbolt function supplied with cloverleaf Cam
 Cams: Cams for other manufacturer's cylinders are available See "Mortise Lock accessories" for part numbers & Manufacturers



ALL DL3500 MORTISE LOCKS ARE WEATHER-RESISTANT

PRODUCT	FINISH	LIST PRICE
DL3500CRR Straight lever classroom function Right hand	US26D US26, US3, US5 & US10B	1,055.00 1,110.00
DL3500CRL Straight lever classroom function Left Hand	US26D US26, US3, US5 & US10B	1,055.00 1,110.00
DL3500DBR Straight lever deadbolt function Right hand	US26D US26, US3, US5 & US10B	1,055.00 1,110.00
DL3500DBL Straight lever deadbolt function Left Hand	US26D US26, US3, US5 & US10B	1,055.00 1,110.00
DL3575CRR Regal (curved) lever classroom Function right hand	US26D US26, US3, US5 & US10B	1,070.00 1,125.00
DL3575CRL Regal (curved) lever classroom Function left hand	US26D US26, US3, US5 & US10B	1,070.00 1,125.00
DL3575DBR Regal (curved) lever deadbolt Function right hand	US26D US26, US3, US5 & US10B	1,070.00 1,125.00
DL3575DBL Regal (curved) lever deadbolt Function left hand	US26D US26, US3, US5 & US10B	1,070.00 1,125.00



TRILOGY ELECTRONIC DIGITAL MORTISE LOCKS (con't)

PRODUCT	DESCRIPTION	LIST PRICE
DL3500SK/26D	Mounted sales kit, straight lever. Available in classroom or deadbolt function.	1,055.00
DL3575SK/26D	Mounted sales kit, Regal curved lever. Available in classroom or deadbolt function.	1,070.00
AL-DTMII	Data Transfer Module	380.00
AL-PCI2	Computer interface cable for serial connection includes DL-Windows software	100.00
ALPCI2-U	Computer interface cable for serial and USB connection includes DL-Windows software	200.00
AL-IR1	Infra red Printer	440.00

MORTISE LOCK ACCESSORIES

CLASSROOM FUNCTION CAMS		
HW956-L	Alarm Lock Standard Straight Cam	3.00
HW956-M	Marks Straight Cam	3.00
HW956-C	Corbin-Russwin Straight Cam	3.00
HW956-S	Schlage Straight Cam	3.00
HW956-A	Arrow Straight Cam	3.00
HW956-R	Sargent Straight Cam	3.00
DEADBOLT FUNCTION CAMS		
HW957-L	Alarm Lock Standard Cloverleaf Cam	3.00
HW957-M	Marks Cloverleaf Cam	3.00
HW957-C	Corbin-Russwin Cloverleaf Cam	3.00
HW957-S	Schlage Cloverleaf Cam	3.00
HW957-A	Arrow Cloverleaf Cam	3.00
HW957-S	Sargent Cloverleaf Cam	3.00
HW1141-S	Schlage IC Cloverleaf Cam	3.00

TRILOGY ELECTRONIC DIGITAL MORTISE LOCKS WITH PRIVACY & RESIDENCY FEATURES

DL4500 SERIES - Electronic battery operated digital proximity lock. Holds up to 2000 codes, Master, Management, Supervisor & basic user. 500 event schedule, real time clock & 40,000 event audit trail. Privacy feature will lock out all users for programmed amount of time. Residency feature-allows exiting without having to lock the door.

SPECIFICATIONS:

- Door Thickness: Fits 1 3/8" to 1 7/8" (4.46cm).
- Backset: 2 3/4" standard
- Strike: 1 1/4" x 4 7/8" strike included
- Handing: Specify RH or LH when ordering, lock is reversible
In the field
- Power: 5 AA alkaline batteries (included)
- Keypad: All metal, 12 button. All functions programmed through keypad.
- Door prep: Standard ANSI A115 Mortise prep, modified by adding additional through-bolt holes
- Compliances: Steelcase lockbody meets BHMA specifications For Grade 1 locks. UL listed to the 10C Positive Pressure Specification. FCC Certified. ADA compliant levers
- Functions: Deadbolt function feature stainless steel deadbolt with 1" (2.55cm) projection, latchbolt with 3/4" (1.91cm) projection and deadlocking latch Deadbolt may be projected from key cylinder from outside door or turn-piece from inside door
- Cylinder: 1 3/8" (3.5cm) mortise cylinder supplied. Will Accept 1 3/8" to 1 1/2" (3.5 – 3.82cm) mortise Cylinder. Deadbolt function supplied with cloverleaf Cam
- Cams: Cams for other manufacturer's cylinders are available See "Mortise Lock accessories" for part numbers & Manufacturers



ALL DL4500 LOCKS ARE WEATHER-RESISTANT

PRODUCT	FINISH	LIST PRICE
DL4500DBR Straight lever deadbolt function Right hand	US26D US26, US3, US5 & US10B	985.00 1,040.00
DL4500DBL Straight lever deadbolt function Left Hand	US26D US26, US3, US5 & US10B	985.00 1,040.00
DL4575DBR Regal (curved) lever deadbolt Function right hand	US26D US26, US3, US5 & US10B	1,005.00 1,055.00
DL4500SK/26D	Mounted sales kit, straight lever. Available in classroom or deadbolt function.	1,005.00
DL4575SK/26D	Mounted sales kit, Regal curved lever. Available in classroom or deadbolt function.	1,060.00
AL-PCI2	Computer interface cable for serial connection includes DL-Windows software	100.00
ALPCI2-U	Computer interface cable for serial and USB connection includes DL-Windows software	200.00
AL-IR1	Infra-red Printer	440.00
AL-DTMII	Data Transfer Module	380.00



MORTISE LOCK ACCESSORIES

DEADBOLT FUNCTION CAMS		
HW957-L	Alarm Lock Standard Cloverleaf Cam	3.00
HW957-M	Marks Cloverleaf Cam	3.00
HW957-C	Corbin-Russwin Cloverleaf Cam	3.00
HW957-S	Schalge Cloverleaf Cam	3.00
HW957-A	Arrow Cloverleaf Cam	3.00
HW957-S	Sargent Cloverleaf Cam	3.00
HW1141-S	Schlage IC Cloverleaf Cam	3.00

TRILOGY ELECTRONIC PROXIMITY MORTISE LOCKS

PDL3500/PL3500 SERIES - Electronic battery operated digital mortise lock. Holds up to 2000 user codes, Master, Management, Supervisor & basic user. 500 scheduled events, real time clock & 40,000 event audit trail. Will read most HID card and keyfob formats.

SPECIFICATIONS:

Door Thickness: Fits 1 3/8" to 1 7/8" (4.46cm).
 Backset: 2 3/4" standard
 Strike: 1 1/4" x 4 7/8" strike included
 Handing: Specify RH or LH when ordering, lock is reversible
 In the field
 Power: 5 AA alkaline batteries (included)
 Keypad: Weatherproof all metal, 12 button. All functions programmed through keypad. Proximity antenna housing molded of ultra high strength, impact resistant Lexan®
 Door prep: Standard ANSI A115 Mortise prep, modified by adding additional through-bolt holes
 Compliances: Steelcase lockbody meets BHMA specifications For Grade 1 locks. UL listed to the 10C Positive Pressure Specification. FCC Certified . ADA compliant levers
 Functions: Classroom function feature stainless steel latchbolt With 3/4" (1.91cm) projection and deadlocking latch Deadbolt function feature stainless steel deadbolt with 1" (2.55cm) projection, latchbolt with 3/4" (1.91cm) projection and deadlocking latch Deadbolt may be projected from key cylinder from outside door or turn-piece from inside door
 Cylinder: 1 3/8" (3.5cm) mortise cylinder supplied. Will Accept 1 1/4" to 1 1/2" (3.5 – 3.82cm) mortise Cylinder. Classroom function supplied with straight Cam and deadbolt function supplied with cloverleaf Cam
 Cams: Cams for other manufacturer's cylinders are available See "Mortise Lock accessories" for part numbers & Manufacturers



ALL PDL3500 LOCKS ARE WEATHER-RESISTANT

PRODUCT	FINISH	LIST PRICE
PDL3500CRR/PL3500CRR Straight lever classroom function Right hand	US26D US26, US3, US5 & US10B	1,350.00 1,405.00
PDL3500CRL/PL3500CRL Straight lever classroom function Left Hand	US26D US26, US3, US5 & US10B	1,350.00 1,405.00
PDL3500DBRPL3500DBR Straight lever deadbolt function Right hand	US26D US26, US3, US5 & US10B	1,350.00 1,405.00
PDL3500DBL/PL3500DBL Straight lever deadbolt function Left Hand	US26D US26, US3, US5 & US10B	1,350.00 1,405.00
PDL3575CRR/PL3575CRR Regal (curved) lever classroom Function right hand	US26D US26, US3, US5 & US10B	1,365.00 1,420.00
PDL3575CRL/PL3575CRL Regal (curved) lever classroom Function left hand	US26D US26, US3, US5 & US10B	1,365.00 1,420.00



TRILOGY ELECTRONIC PROXIMITY MORTISE LOCKS (con't)

PRODUCT	DESCRIPTION	LIST PRICE
PDL3575DBRPL3575DBR	US26D	1,365.00
Regal (curved) lever deadbolt	US26, US3, US5 & US10B	1,420.00
Function right hand		
PDL3500SK/26D	Mounted sales kit, straight lever. Available in classroom or deadbolt function.	1,350.00
PDL3575SK/26D	Mounted sales kit, Regal curved lever. Available in classroom or deadbolt function.	1,365.00
AL-PCI2	Computer interface cable for serial connection includes DL-Windows software	100.00
ALPCI2-U	Computer interface cable for serial and USB connection includes DL-Windows software	200.00
AL-IR1	Infra-red Printer	440.00
AL-DTMII	Data Transfer Module	380.00
AI-PRE	Prox Card Enroller	630.00
ALHID1326	Proximity Access Cards 100 Per Box	440.00
ALHID1336	Proximity, Magnetic Stripe and Photo ID cards 100 per box	895.00
ALHID1386	Proximity and Photo ID Card 100 per box	810.00
ALHID1391	MicroProx Tag 10 per box	80.00
ALHID1346	Proximity keyfob 10 per box	100.00

MORTISE LOCK ACCESSORIES

CLASSROOM FUNCTION CAMS		
HW956-L	Alarm Lock Standard Straight Cam	3.00
HW956-M	Marks Straight Cam	3.00
HW956-C	Corbin-Russwin Straight Cam	3.00
HW956-S	Schlage Straight Cam	3.00
HW956-A	Arrow Straight Cam	3.00
HW956-R	Sargent Straight Cam	3.00
DEADBOLT FUNCTION CAMS		
HW957-L	Alarm Lock Standard Cloverleaf Cam	3.00
HW957-M	Marks Cloverleaf Cam	3.00
HW957-C	Corbin-Russwin Cloverleaf Cam	3.00
HW957-S	Schlage Cloverleaf Cam	3.00
HW957-A	Arrow Cloverleaf Cam	3.00
HW957-S	Sargent Cloverleaf Cam	3.00
HW1141-S	Schlage IC Cloverleaf Cam	3.00

TRILOGY ELECTRONIC DIGITAL PROXIMITY MORTISE LOCKS WITH PRIVACY & RESIDENCY FEATURES

PDL4500/PL4500 SERIES - Electronic battery operated digital proximity lock. Holds up to 2000 codes, Master, Management, Supervisor & basic user. 500 event schedule, real time clock & 40,000 event audit trail. Will read most HID card and keyfob formats. Privacy feature will lock out all users for a programmed amount of time. Residency feature-allows exiting without having to lock the door.

SPECIFICATIONS:

Door Thickness: Fits 1 3/8" to 1 7/8" (4.46cm).
 Backset: 2 3/4" standard
 Strike: 1 1/4" x 4 7/8" strike included
 Handing: Specify RH or LH when ordering, lock is reversible
 In the field
 Power: 5 AA alkaline batteries (included)
 Keypad: Weatherproof all metal, 12 button. All functions programmed through keypad. Proximity antenna housing molded of ultra high strength, impact resistant Lexan®
 Door prep: Standard ANSI A115 Mortise prep, modified by adding additional through-bolt holes
 Compliances: Steelcase lockbody meets BHMA specifications For Grade 1 locks. UL listed to the 10C Positive Pressure Specification. FCC Certified . ADA compliant levers
 Functions: Deadbolt function feature stainless steel deadbolt with 1" (2.55cm) projection, latchbolt with 3/4" (1.91cm) projection and deadlocking latch Deadbolt may be projected from key cylinder from outside door or turn-piece from inside door
 Cylinder: 1 3/8" (3.5cm) mortise cylinder supplied. Will Accept 1 1/4" to 1 1/2" (3.5 – 3.82cm) mortise Cylinder. Deadbolt function supplied with cloverleaf cam
 Cams: Cams for other manufacturer's cylinders are available See "Mortise Lock accessories" for part numbers & Manufacturers



ALL PDL4500 LOCKS ARE WEATHER-RESISTANT

PRODUCT	FINISH	LIST PRICE
PDL4500DBR/PL4500DBR Straight lever deadbolt function Right hand	US26D US26, US3, US5 & US10B	1,260.00 1,320.00
PDL4500DBL/PL4500DBL Straight lever deadbolt function Left Hand	US26D US26, US3, US5 & US10B	1,260.00 1,320.00
PDL4575DBR/PL4575DBR Regal (curved) lever deadbolt Function right hand	US26D US26, US3, US5 & US10B	1,275.00 1,335.00
PDL4575DBL/PL4575DBL Regal (curved) lever deadbolt Function right hand	US26D US26, US3, US5 & US10B	1,275.00 1,335.00
PDL4500SK/26D	Mounted Sales Demo	1,280.00
AL-PCI2	Computer interface cable for serial connection with DL-Windows software	100.00
ALPCI2-U	Computer interface cable for serial and USB connection with DL-Windows software software	200.00
AL-IR1	Infra-red Printer	440.00



**TRILOGY ELECTRONIC DIGITAL PROXIMITY MORTISE LOCKS
WITH PRIVACY & RESIDENCY FEATURES (con't)**

PRODUCT	FINISH	LIST PRICE
AL-DTMII	Data Transfer Module	380.00
AL-PRE	Prox Card Enroller	630.00
ALHID1326	Proximity Access Cards 100 Per Box	440.00
ALHID1336	Proximity, Magnetic Stripe and Photo ID cards 100 per box	895.00
ALHID1386	Proximity and Photo ID Card 100 per box	810.00
ALHID1391	MicroProx Tag 10 per box	80.00
ALHID1346	Proximity keyfob 10 per box	100.00

MORTISE LOCK ACCESSORIES


DEADBOLT FUNCTION CAMS		
HW957-L	Alarm Lock Standard Cloverleaf Cam	3.00
HW957-M	Marks Cloverleaf Cam	3.00
HW957-C	Corbin-Russwin Cloverleaf Cam	3.00
HW957-S	Schlage Cloverleaf Cam	3.00
HW957-A	Arrow Cloverleaf Cam	3.00
HW957-S	Sargent Cloverleaf Cam	3.00
HW1141-S	Schlage IC Cloverleaf Cam	3.00

Trilogy Exit Trim

Battery operated Trilogy outside trim works with Von Duprin 99, Corbin ED5000, Yale 7100, Dorma 9300, Arrow 3800, Sargent 8800, Precision 1100, 2200 & Cal Royal 9800 series panic devices. Available in DL series (keypad) or PDL (prox/keypad) formats. Features include 2,000 user codes, 500 scheduled events and 40,000 event audit trail.

SPECIFICATIONS:

- Cylinder: Uses standard rim cylinder to operate key override function. Will accept 6 or 7 pin interchangeable core cylinders – see below.
- Handing: Non-handed
- Power: 5 AA alkaline batteries (included) mounted on inside of door.
- Keypad: Weather-resistant all metal, 12 button. All functions Programmable through the keypad.
PDL version proximity antenna housing molded of ultra high strength, impact resistant Lexan®

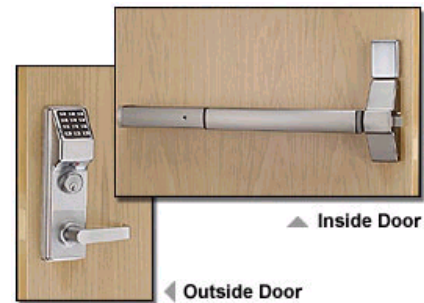

ALL ET SERIES LOCKS ARE WEATHER-RESISTANT

ETDL series	26D Finish	905.00
ETDL series	US3, US5, US26 & 10B Finish	960.00
ETDL series w/Regal lever	26D Finish	920.00
ETDL series w/Regal lever	US3, US5, US26 & 10B Finish	975.00
ETPDL series	26D Finish	1,200.00
ETPDL series	US3, US5, US26 & 10B Finish	1,255.00
ETPDL series w/Regal lever	26D Finish	1,215.00
ETPDL series w/Regal lever	US3, US5, US26 & 10B Finish	1,270.00
ETPL series	26D Finish	1,200.00
	US3, US5, US26 & 10B Finish	1,255.00
ETPL series w/Regal lever	26D Finish	1,215.00
	US3, US5, US26 & 10B Finish	1,270.00
Specify finish on adapter kit	Alarm Lock Standard Rim Cylinder	
ET- AL	Adapter kit (Schlage C keyway)	40.00
ET- AR	Arrow Standard Rim Cylinder Adapter kit	40.00
ET- AS	ASSA Standard Rim Cylinder Adapter kit	40.00
ET - C	Corbin Standard Rim Cylinder Adapter kit	40.00
ET - M	Medeco Standard Rim Cylinder Adapter kit	40.00
ET - R	Sargent Standard Rim Cylinder Adapter kit	40.00
ET - S	Schlage Standard Rim Cylinder Adapter kit	40.00
ET - Y	Yale Standard Rim Cylinder Adapter kit	40.00
ET - ARIC	Arrow IC 6 & 7 Pin Rim Cylinder Adapter kit	65.00
ET - BIC	Best IC 6 & 7 Pin Rim Cylinder Adapter kit	65.00
ET - CIC	Corbin IC Rim Cylinder Adapter kit	65.00
ET - MIC	Medeco IC 6 & 7 Pin Rim Cylinder Adapter kit	65.00



ET - RIC Finish = 26, 26D, 3, 5, 10B	Sargent IC Rim Cylinder Adapter kit	65.00
ET - SIC Finish = 26, 26D, 3, 5, 10B	Schlage IC Rim Cylinder Adapter kit	65.00
ET - YIC Finish = 26, 26D, 3, 5, 10B	Yale IC 6 Pin Rim Cylinder Adapter kit	65.00

Trilogy Exit Trim Accessories

Product	Description	LIST PRICE
ETDLSKZ/26D V99, C50, A38, D93, Y71, S88, CR8, P11	Mounted sales kit For demo purposes	925.00
ETPDLSKZ/26D V99, C50, A38, D93, Y71, S88, CR8, P11	Mounted sales kit For demo purposes	1,205.00
AL-PCI2	Computer interface cable for serial connection Includes DL-Windows software	100.00
ALPCI2-U	Computer interface cable for serial and USB connection Includes DL-Windows software	200.00
AL-IR1	Infra-red Printer	440.00
AL-DTMII	Data Transfer Module	380.00
AI-PRE	Prox Card Enroller	630.00
ALHID1326	Proximity Access Cards 100 per box	440.00
ALHID1336	Proximity, Magnetic Stripe and Photo ID cards 100 per box	895.00
ALHID1386	Proximity and Photo ID Card 100 per box	810.00
ALHID1346	Proximity keyfob packed 10 per box	100.00
ALHID1391	MicroProx Tag 10 per box	80.00

PLEASE SEE “HOW TO ORDER” CHART ON PAGE 18 TO PROPERLY ORDER YOUR TRILOGY EXIT TRIM.


IF YOU REQUIRE THE LOCK TO BE PREPPED FOR A THICKER DOOR, YOU MUST ORDER BASED ON THE SELECTIONS SHOWN. THE BASIC MODEL IS PREPPED FOR A 1 5/8” TO 1 7/8” DOOR.

***** PRECISION 2200 SERIES WILL WORK WITH THE VON DUPRIN 99 PREP*****

HOW TO ORDER YOUR TRILOGY EXIT TRIM

Below is a “How to Order” guide for the Trilogy Exit Trim products. Please follow this guide when placing orders to avoid any delay in processing your order.

All units are sold with a generic cylinder adapter installed. When you are using a specific Brand of rim cylinder, you must purchase a Cylinder Adapter Kit from the chart below.

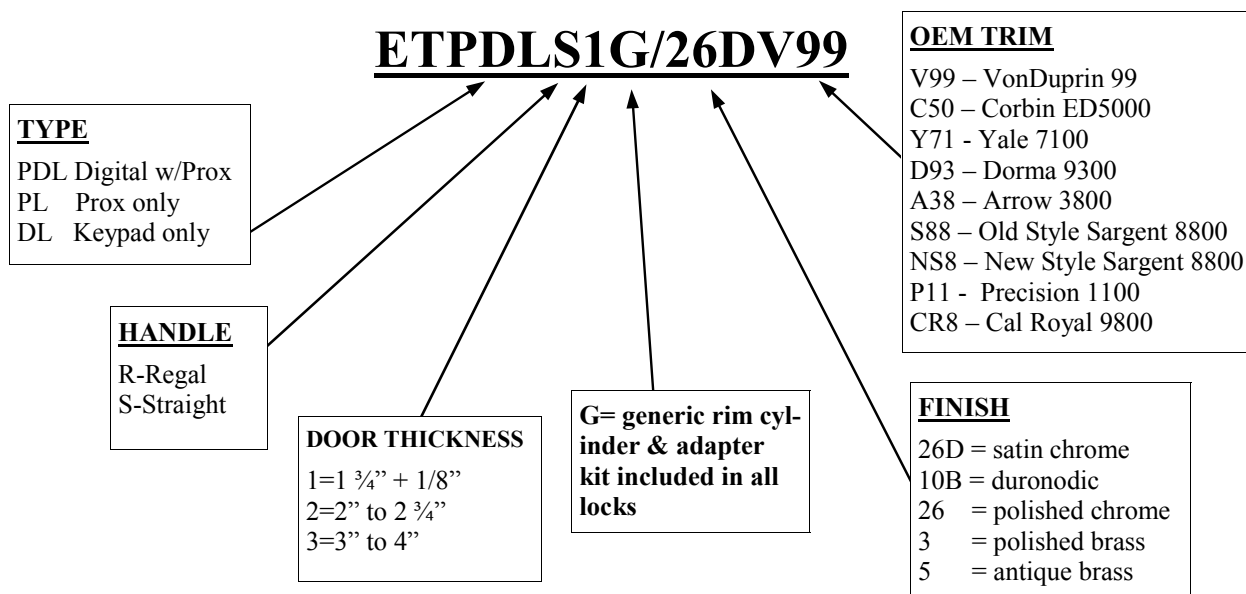

Please note that Precision 2200 series will match up to the Von Duprin 99 series Trilogy

CYLINDER ADAPTER KITS

You must choose one of the cylinder adapter kits below if you are using a name brand cylinder in the lock.

ET - AL	- Alarm Lock standard (Schlage C keyway)
ET - BIC	- Best IC 6 & 7 pin
ET - S	- Schlage standard rim
ET - SIC	- Schlage IC
ET - R	- Sargent standard rim
ET - RIC	- Sargent IC
ET - Y	-Yale standard rim
ET - YIC	-Yale IC 6 pin
ET - C	- Corbin standard rim
ET - CIC	- Corbin IC
ET - M	- Medeco standard rim
ET - MIC	- Medeco IC 6 & 7 pin
ET - AR	- Arrow standard rim
ET - ARIC	- Arrow IC 6 & 7 pin
ET - AS	- ASSA standard rim



TRILOGY LOCK ACCESSORIES

S5980-1	2 3/8" Latch US26D Used on DL2700, DL3000 & PDL3000	25.00
S5980-2	2 3/8" Latch US5 Used on DL2700, DL3000 & PDL3000	25.00
HW580	Schlage® key override tailpiece for DL2700, DL3000 & PDL3000	6.00
HW620	Lori® key override tailpiece for DL2700/ DL3000/PDL3000	6.00
HW597	Alarm Lock DL2700, DL3000 & PDL3000 key override tailpiece	6.00
HW598	DL2700IC, DL3000IC & PDL3000IC Interchangeable core tailpiece	6.00
WA160	Washer for HW620, HW597 & HW598	3.00
S6072	Set of spacer for doors less Than 1 3/8" thick Used on cylindrical locks	110.00
CW-27AB	Wrap around plate US5	60.00
CW-27PB	Wrap around plate US3	60.00
CW-27S	Wrap around plate US32D	60.00
DL2700DJ	Drilling jig for DL2700 & DL3000	325.00
DL2700CASE DL3500CASE	Carrying case for cylindrical locks Carrying case for mortise & ET locks	215.00 235.00

TRILOGY ELECTRONIC DIGITAL KEYPAD

DK3000/PDK3000 Series - Electronic digital keypad. Available in keypad only and keypad plus prox. Holds up to 2,000 user codes, Master, Management, Supervisor & basic user. 500 event schedule, real time clock & 40,000 event audit trail. Prox unit will read most HID cards and keyfobs.

Specifications:

- Wall mount : Single gang box mounting .
- Wiring : Unit provides flying leads for power, relays, tamper and remote Release.
- I/O Specs: 2 form C relays 5AMP minimum contact rating. Red & green LED Indicators. 1 remote release input. Sounder and tamper.
- Power: Operating voltage 12-24VDC selectable. Cutting 2 insulated wire loops provides 12V operation. Power supply not included.




ALL DK3000/PDK3000 ARE WEATHER-RESISTANT

PRODUCT	FINISH	LIST PRICE
DK3000	Metalic silver (MS) Metalic bronze(MB) US26, US26D, US3, US5 & US10B	490.00 600.00
PDK3000	Metalic silver (MS) Metalic bronze(MB) US26, US26D, US3, US5 & US10B	765.00 870.00
AL-PCI2	Computer interface cable for serial connection includes DL-Windows software	100.00
ALPCI2-U	Computer interface cable for serial and USB connection includes DL-Windows software	200.00
AL-IR1	Infra-red Printer	440.00
AL-DTMII	Data Transfer Module	380.00
AI-PRE	Prox Card Enroller	630.00
ALHID1326	Proximity Access Cards 100 per box	440.00
ALHID1336	Proximity, Magnetic Stripe and Photo ID cards 100 per box	895.00
ALHID1386	Proximity and Photo ID Card 100 per box	810.00
ALHID1346	Proximity keyfob packed 10 per box	100.00
ALHID1391	MicroProx Tag 10 per box	80.00


ALARMED PANIC LOCKS

Models 250, 260, 700, 710 & 11A— Battery operated alarmed panic locks. All models (except 11A) feature deadbolt & deadlatch for extra security. Selectable 2-minute or constant alarm. 260/710. All models (except 11A) feature a 2-minute auto re-set on the alarm.



SPECIFICATIONS:

- Cover: Die-cast metal
- Push Bar: Extruded Aluminum channel and push bar
- Handed: All models non-handed except 11A
- Installation: Surface mounted for single or double doors
- Cylinder: Accepts most standard size rim cylinders for inside And outside key control (not included)
- Power: Uses 1 9v battery (included). Normal battery life 1 Year. Can be powered by AC power by using either PP100 or AC9.
- Lock bolt: 1" throw heavy die cast with reinforced Steel inserts.
- Alarm: Dual piezo siren measured at 95db

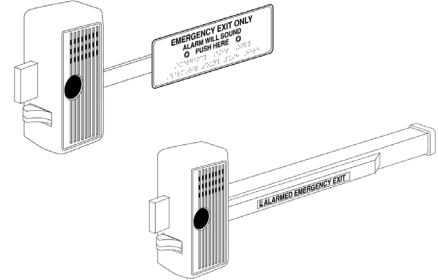

PRODUCT	FINISH	LIST PRICE
250 (PADDLE)	US28	335.00
260 (PADDLE)	US28	370.00
700 (36" BAR)	US28, US312 & Red	415.00
700X48 (48" BAR)	US28 & US312	435.00
710 (36"BAR)	US28	435.00
710X48 (48"BAR)	US28	445.00
11A	Deadbolt only exit lock. Handed order 11A or 11ALH. Use BP6 Battery.	400.00

ACCESSORIES

CER-KD CER-12345 Rim Cylinder for Outside & Inside Key Control	Solid Brass Body Satin Chrome Face	20.00
730 Single Door Strike for 250,260,700 & 710	US28 & US312	35.00
732 Double Door Strike for 250,260,700 & 710	US28 & US312	35.00
K24A	11A Single door strike	25.00
K28	11A Double door strike	30.00
K210A	11A Strike for in-swing doors	35.00
44 Double Door Holder	Aluminum	85.00
22 Emergency Exit Pull (250/260/11A)	Aluminum	65.00
707 Exterior Door Pull use on 250,260 700 & 710 only	Metalic Silver (MS) Metalic Bronze (MB)	90.00
711 Exterior Finger Pull	US28 & US312 Use on 250,260,700 & 710 only	20.00
767 Mounting Plate for Aluminum Glass Door	US28 & US312 Use on 250,260,700 & 710 only	10.00
PP100 Optional AC Power Supply	Aluminum	185.00
AC9 Optional AC Power Supply	Aluminum	50.00
9936	Used to mount 11A on 36" glass door	65.00
9948	Used to mount 11A on 48" glass door	70.00
261	Current Transfer	50.00
BP6	Replacement battery for 11A	25.00


REVISED

DOOR ALARMS

PG10, PG21 & PG30 SERIES – Battery operated surface mounted door alarms. Alarms magnetically activated. Easy to install. Convenient plug-in “No cut” jumpers.

SPECIFICATIONS:

- Power: PG21, PG30 use 9v battery (supplied). PG10 & LL1 use BP6 (supplied). BP6 must be purchased from Alarm Lock.
AC power supply can also be used as a battery back up (see below).
- Alarm: Dual piezo siren measured at 95db.
- Cylinder: Accepts most 1¼” mortise cylinder used for interior activation (not supplied) and standard size rim cylinder used for exterior activation (not supplied).
- Installation: Surface mounted for single or double doors.
- Cover: Die cast metal.

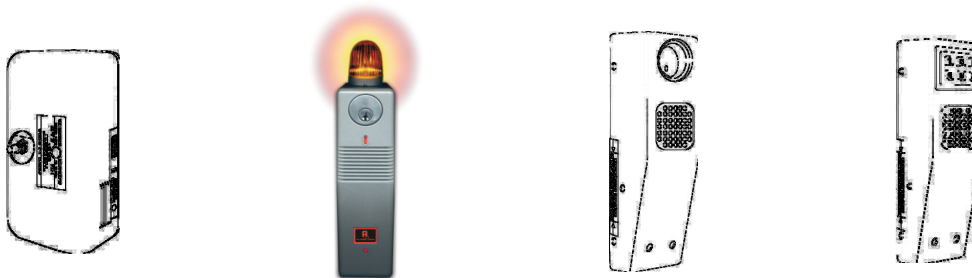


PRODUCT	DESCRIPTION	LIST PRICE
PG10	Available in aluminum finish uses BP6 Battery replaced only through Alarm Lock	205.00
LL1	Same as PG10 with strobe light on top.	215.00
PG21	Available in metallic silver and metallic bronze. Uses 9v battery.	205.00
PG21E	Available in metallic silver only. Uses 9v battery. Includes additional terminal strip For remote monitoring and multiple door Alarming.	225.00
PG21MSS	Available in metallic silver and metallic bronze. Uses 9v battery with yellow strobe on top for noisy areas	265.00
PG30	Available in metallic silver and metallic bronze. No cylinders required. All exit, entry and security levels programmed through keypad. 3 security levels, master, management and passage. Use 9v battery.	245.00
PG30KPD	Exterior keypad used with PG30 only.	145.00
CEM-KD CEM-12345	Standard mortise cylinder for interior activation. Solid brass body, satin chrome face	20.00
CER-KD CER-12345	Standard rim cylinder for exterior activation. Solid brass body, satin chrome face.	20.00
PP100	AC battery back-up complete with armored cable and housing.	185.00
AC9	AC battery back-up housing only	50.00
BP6	Replacement battery for PG10 & LL1	25.00

DELAYED EGRESS PANIC LOCKS

715 Series - Stand alone delayed egress panic lock. 15 second delayed latch, instant alarm. Instant egress in case of emergency or fire. Meets NFPA 101 Life Safety Code. Includes monitoring output for secondary siren , CCTV or remote monitoring. Smoke detector input.

SPECIFICATIONS:

- Cover: Die cast metal
- Push bar: Extruded aluminum push bar and channel
- Handed: Non-handed
- Installation: Surface mounted for single or double doors
- Cylinder: Accepts most standard size rim cylinder used for Inside and outside key control
- Power: AC powered with 9v battery back-up for siren. Transformer And armored cable included
- Lock bolt: 1" throw heavy die cast with reinforced steel inserts
- Alarm: Dual piezo siren measured at 95db

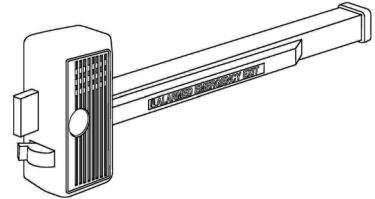


PRODUCT	DESCRIPTION	LIST PRICE
715X28X88	15 second delayed egress lock. Aluminum finish with monitoring output. 33" bar.	720.00
715x28x88x48	15 second delayed egress lock. Aluminum finish with monitoring output. 48" bar	730.00
CER-KD CER-12345	Standard rim cylinder	20.00
725x28	Single door strike (included with unit)	35.00
735x28	Double door strike (not included with unit)	35.00
SWK-715	Surface wiring kit for wood or glass doors	65.00
767x28	Metal mounting plate for glass doors	10.00
277-12	277v transformer to wire 715 from Exit Sign	45.00
271	Armored cable	35.00

ELECTRIC DEADBOLTS

Models 103 & 104 Fail-safe or fail-secure electric deadbolts. Available In 12v or 24v AC or DC. Perfect for use on narrow stile Doors. Complete with angle, mortise or flush mount strikes. Use with standard key or push button switch.

SPECIFICATIONS:

- Cover: Molded aluminum
- Power : Requires 400 mA for 24v, 800mA for 12v unit
- Deadbolt: Powered by a continuous duty solenoid. 5/8" diameter And 5/8" projection.



PRODUCT	DESCRIPTION	LIST PRICE
103	24v AC or DC. Includes three strikes and magnets. Fail-safe	250.00
103x12	12v AC or DC. Includes three strikes and magnets. Fail-safe	285.00
104RA	24v AC or DC. Includes three strikes and magnets. Fail-secure	290.00
104x12	12v AC or DC. Includes three strikes and magnets. Fail-secure	325.00
221 / 241	24v Plug-in style transformers	36.00
222	24v Wire-in style transformer	36.00

REMOTE RELEASE MAGNET

RR-PM1200 SERIES – Stand alone remote operated infra-red mag lock. Allows remote Lock control by a transmitting keyfob. Infra-red signal is detectable From interior and exterior sides of the door. Keyfob will operate From 10 feet on exterior side and 35 feet from interior side.

SPECIFICATIONS:

Magnet: 1200lb 12v DC magnet
 Power: Includes 12v AC plug in transformer. A 12v DC power supply Can be utilized (not included)
 Keyfob: Single button, dual LED infra-red transmitting. Up to 100 keyfobs Can be programmed into a single magnet.
 Programming: Each keyfob must be presented to the magnet to enroll keyfob ID into Software.



PRODUCT	DESCRIPTION	LIST PRICE
RR-PM1200PAK	Includes 1 1200lb remote magnet, one AL-REMOTE keyfob and one 12v AC transformer	470.00
RR-PM1200	1200lb remote magnet	410.00
AL-REMOTE	Remote keyfob	55.00

POWER MAGNETS AND EXIT BUTTONS

PRODUCT	DESCRIPTION	LIST PRICE
PM600BI	600lb magnetic lock field selectable 12/24v DC 9 7/8" x 1 11/16" x 1" Aluminum finish	240.00
PM600L	600lb magnetic lock field selectable 12/24v DC 9 7/8" x 1 11/16" x 1" Aluminum finish L.E.D. indicator & door bond sensor for remote monitoring	280.00
PM1200	1200lb magnetic lock field selectable 12/24v DC 9 7/8" x 1 11/16" x 1" Aluminum finish	255.00
PM1200SL	1200lb magnetic lock field selectable 12/24v DC 9 7/8" x 1 11/16" x 1" Aluminum finish L.E.D. indicator & door bond sensor for remote monitoring	295.00
PM1200SLBI	1200lb magnetic lock field selectable 12/24v DC 21" x 1 11/16" x 1" Aluminum finish L.E.D. indicator & door bond sensor for remote monitoring for use on double doors	530.00
PM120040	1200lb magnetic lock field selectable 12/24v DC 9 7/8" x 1 11/16" x 1" dark bronze finish	255.00
PM1200SLBI40	1200lb magnetic lock field selectable 12/24v DC 21" x 1 11/16" x 1" dark bronze finish L.E.D. indicator & door bond sensor for remote monitoring for use on double doors	530.00
PE1	Round red exit button non illuminate Standard switch plate	95.00
PE2	Square green illuminated exit button Standard switch plate	95.00
PE2S	Square green illuminated exit button Narrow switch plate	90.00
PMA-ANGL1	Angle bracket 1 1/2 x 10 1/2	40.00
PMA-ANGL2	Angle bracket adjustable 1 1/2 x 2 3/8 x 10 1/2	65.00
PMA-ANGL3	Angle bracket adjustable 1 3/8 x 2 3/8 x 10 1/2	65.00
PMA-FILL1	Filler plate 10 1/2 x 3/4 x 5/8	30.00



POWER MAGNETS AND EXIT BUTTONS (cont'd)

PRODUCT	DESCRIPTION	LIST PRICE
PMA-FILL2	Filler plate 10 ½ x ¾ x ½	30.00
PMA-Z1	Z bracket adjustable use with PM600B1 Series	135.00
PMA-Z2	Z bracket adjustable use with PM1200 series	215.00
PMA-ARMH1	Armature plate 7 ¼" x 1 ½" x 19/32"	130.00
PMA-ARMH2	Armature plate 7 ½" x 2 7/16" x 19/32"	145.00

ALARM LOCK SYSTEMS, INC. WARRANTY POLICY

Alarm Lock Systems Inc. warrants its products to be free from manufacturing defects in material and workmanship. The length of said warranty is 24 months on all products from the date of manufacture.

Any customer may get an over-the-counter exchange with the original seller (distributor) for any Alarm Lock product failing to operate properly.

For those customers who have direct accounts with Alarm Lock, please follow this procedure to return product for inspection:

1. Call Customer Service at 1 800 252-5625 ext. 64 to obtain a return authorization number.
2. Advise your customer that upon receipt of said product, Alarm Lock will inspect that product.
3. If said product is found not to be operating properly because of a factory defect and is within the warranty period, Alarm Lock will, at the customer's request, either issue a product replacement or a credit to the customer's account.
4. If said product is found not to be operating properly because, it has been repaired by others, improperly installed, improperly used, abused, altered, defaced in any way, or is out of warranty, there will be a charge incurred to repair the product.

Any customer, who does not have a direct account, can return their product for inspection if it is not operating properly. Upon inspection, the customer will be contacted and advised of the results of the inspection. If the product is found not to be operating properly because of a manufacturing defect, Alarm Lock can repair or replace the product. If the product is found not to be operating properly because it has been repaired by others, improperly installed, improperly used, abused, altered, defaced in any way, or is out of warranty, there will be a charge incurred to repair the product.

If you experience a problem with any Alarm Lock product, you may contact Alarm Lock's Technical Support directly at 1-800-252-5625 ext. 65.

Alarm Lock Systems, Inc.
345 Bayview Ave
Amityville, NY 11701
1 800 252-5625
1 631 789-3383
www.alarmlock.com

ALA132M
07/05